
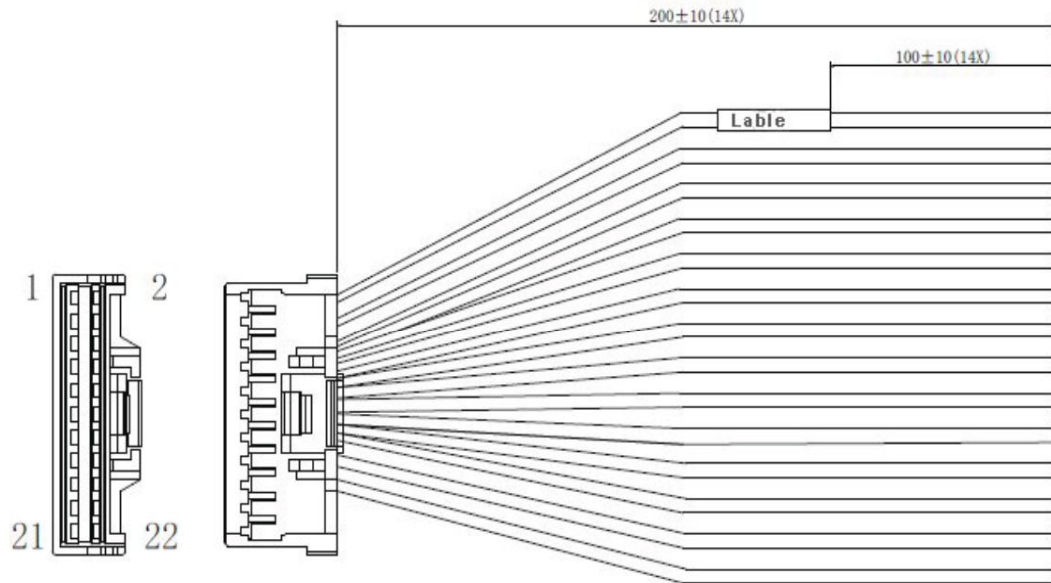


EX4-ALC 8 Input / 2 Output / RS485 Trigger Cable for XDR-450

Feature:

- Provides 8 Input / 2 output connection
- Provides integration to external/ 3rd party trigger devices
- High and Low Voltage Trigger
- RS485 Connection
- Connection to EX4-PGM Programming touchscreen tablet

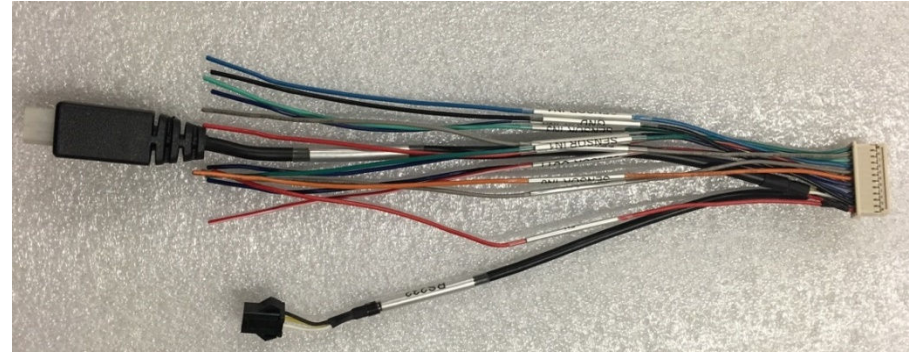

Diagram

501646-2200

- | | | |
|----|--------------------|-------------|
| 1 | Green Cable | SENSOR IN1 |
| 3 | Orange Cable | SENSOR IN2 |
| 5 | Purple Cable | SENSOR IN3 |
| 7 | Light Blue Cable | SENSOR IN4 |
| 2 | Gray Cable | SENSOR IN5 |
| 4 | Light Green Cable | SENSOR IN6 |
| 6 | Pink Cable | SENSOR IN7 |
| 8 | Yellow Cable | SENSOR IN8 |
| 9 | Red Cable | +12V |
| 10 | Black Cable | GND |
| 11 | Blue & Black Cable | SENSOR-OUT1 |
| 13 | Blue & Black Cable | SENSOR-OUT2 |
| 17 | Blue Cable | SPEED IN |
| 18 | Black Cable | GND |

For Sensor In:

High Voltage: 5~12V
Low Voltage : 0~2V

For Sensor Out:

Triggered Voltage: 12V
Default Voltage: 0V