

**System:**

- 2 CH Video Input (RCA)
- 4.3 inch (diagonal) screen
- 480 x 272 Resolution
- 12VDC (9V – 16V DC Input)
- Brightness, Contrast , Saturation, Tint
- Contrast: 350 : 1
- PAL / NTSC compatible
- Operating Range: -4F ~ 158F

**Parts included:**


- Monitor x 1
- RCA video cable x 1
- Power cable x 1



**Warning: Install product only when vehicle is safely parked and Power is OFF**  
**View and access the monitor only when safe to do so**

**Installation Guide**

1. Determine the location of the mounting position
2. Clean surface with damp towel, wait to dry
3. Securely affix monitor to surface with adhesive on the bottom of the monitor
4. Connect Power cable to the monitor, use electrical tape if necessary
5. Connect RCA video cable to source , use electrical tape if necessary. If connecting to 2 video source, an additional RCA cable is required

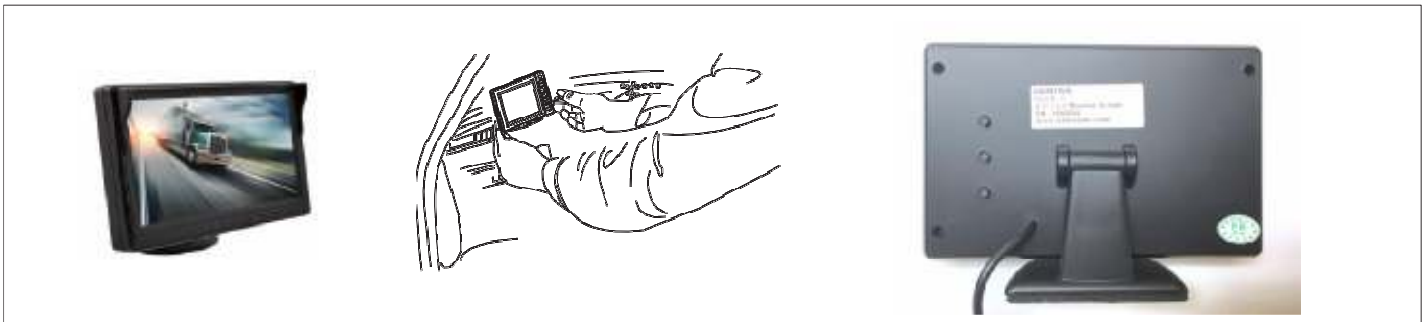

**Operation:**

1. Press the Middle Round key ● to Enter Menu (Brightness, Contrast, Saturation, Tint, Language, Video Format 16:9 / 4:3)
2. Press the top ● or bottom ● to change setting

Monitor displays 1 camera at a time and consider CH 2 as the primary. In order to switch to CH1 momentarily, the 2<sup>nd</sup> camera can be connected to a momentary power source such as reverse light of the vehicle.

